




# Slide

Ref. KP4017


Last check 07/03/2016

Pag. 1/2

EN-1176-1:2009

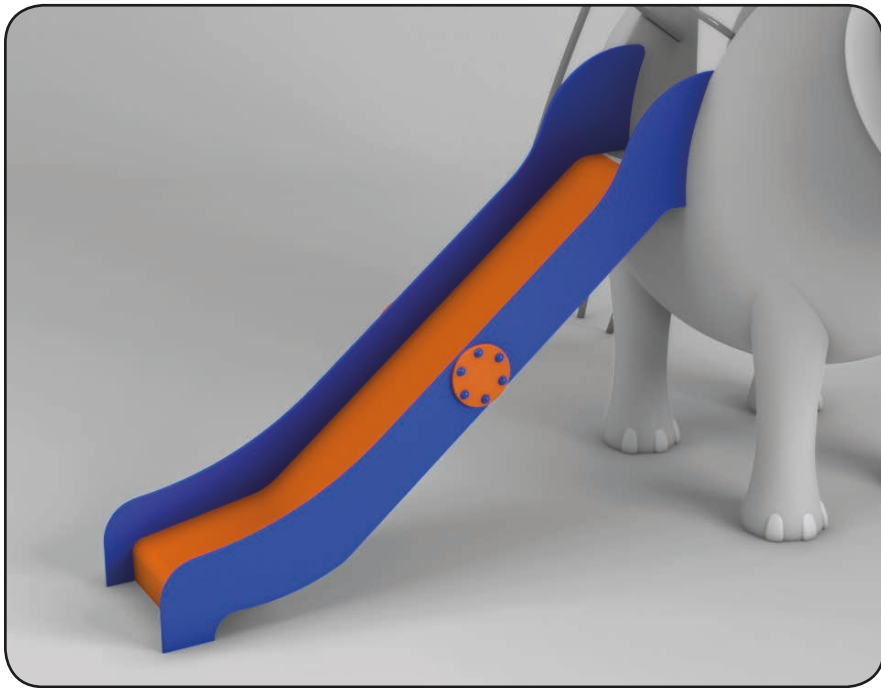

Installation example

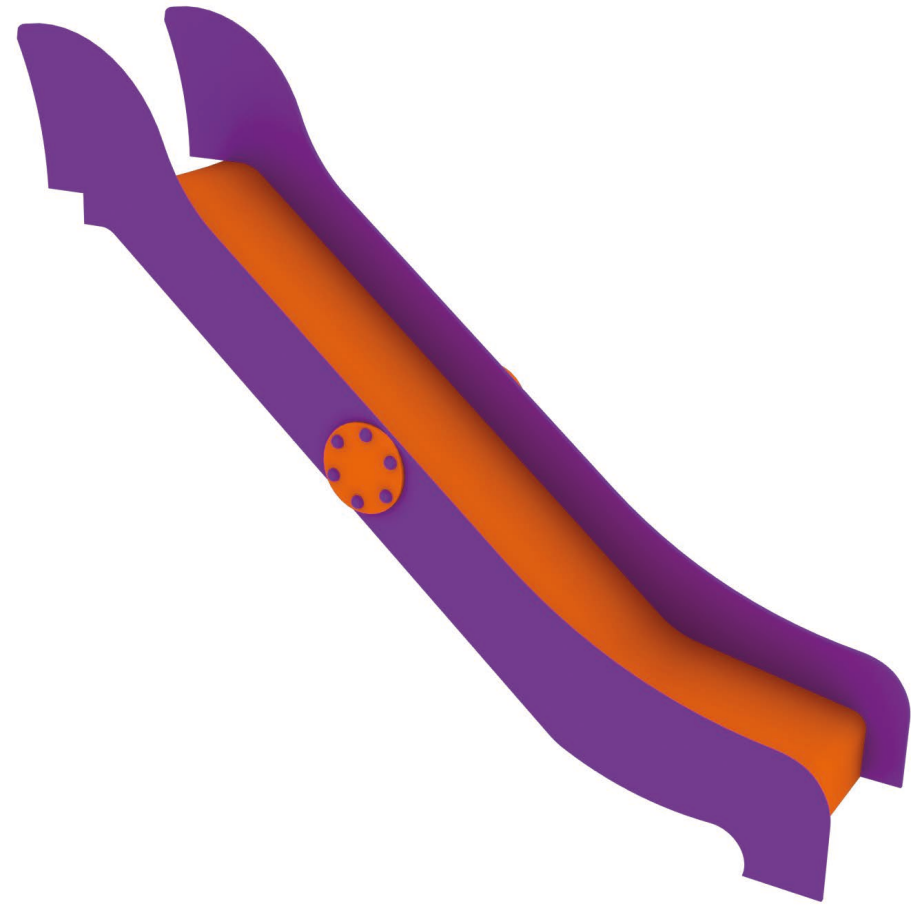

**ACCESSORIES**



#### Technical information.

**Sides:** Manufactured in high density polyethylene in different colors.

**Ramp:** Made in orange fiberglass.

**Installation:** Anchored to the playground with 6 screws.

#### Technical data.

**Assembly:** 2 pers.

**Weight:** 85 Kg.

**Total height:** 1,88 m.

**Free fall height:** 1,5 m.

**Dimensions:** 2,4 x 0,6 m.

#### For further information.

Contact us.

KIWI PLAYGROUNDS & WOODS.

C/ Foia, 13 P.I. Alqueria de Moret


46210 Picanya (Valencia)

Tel. +34 963 313 677

E-mail: [kiwi@kiwipw.com](mailto:kiwi@kiwipw.com)

Web: [www.kiwipw.com](http://www.kiwipw.com)

The company reserves its right to apply any modifications or changes to their products.

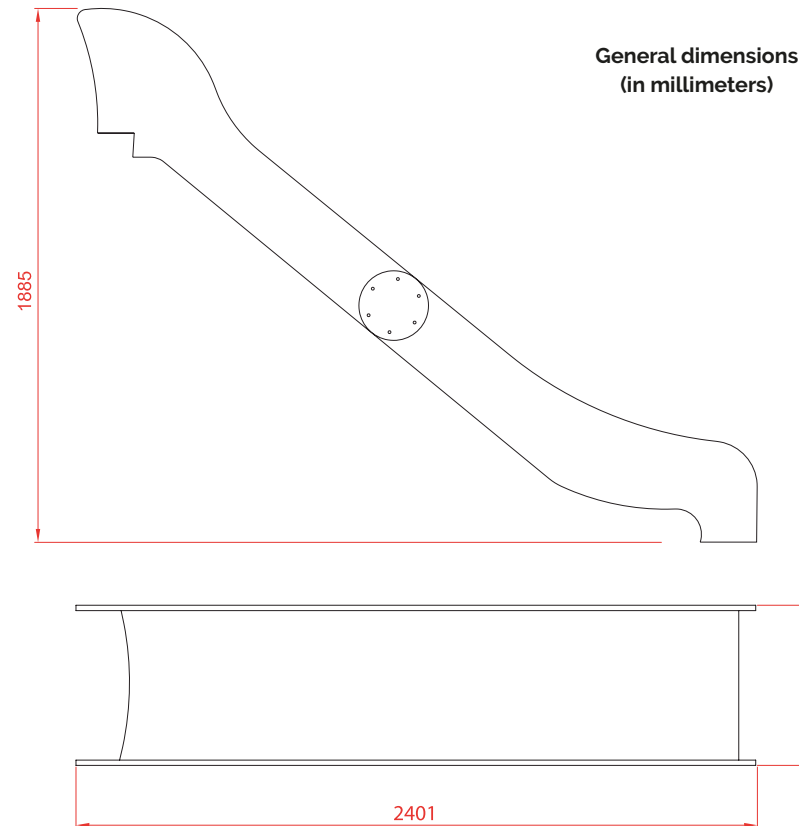

#### Installation.

- Anchoring to the floor with 2 steel brackets and 2 expansion bolts. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

#### Maintenance.

- Check: All fixing points, screws and bolts must be periodically checked and they will be tightened and adjusted again if necessary. The checking date must be annotated in order to establish a control.

#### Inspections.

- Routine Inspection: A visual and functional inspection must be carried out every 3 months in order to check that the module has not suffered any harm due to vandalism or mishandling.

- Yearly Inspection: A full inspection of the installation as a whole must be done in order to check that it keeps all norm standards and that it has not suffered any alterations.