





C/ Foia, 13 P.I. Alquería de Moret 46210 Picanya (Valencia)



+34 963 313 677



@ kiwi@kiwipw.com



www.kiwipw.com

The company reserves the right to perform any modification or change in their products.



The Turtle (age 3-12 years)

SERIE Special projects

Technical information

Animal: Build in polyester painted by mass, with gel-coat of predominant colour and anti-graffiti treatment.

Surface: Stepable zone realized in high resistance continuous wet-pour rubber surfacing (EPDM).

Anchoring: Galvanized Steel for mounting on

concrete foundation.







C/ Foia, 13 P.I. Alquería de Moret 46210 Picanya (Valencia)



kiwi@kiwipw.com

www.kiwipw.com The company reserves the right to perform any modification or change in their products.

Technical data

Assembly: 2 pers. 4 hours.


Weight: 500 Kg. Total high: 2,4 m.

Free fall height: 1,00 m. Safety area: 53,88 m².


Biggest element dimensions: 3 m. Spare parts disponibility: 3 years.

Dimensions (in meters)



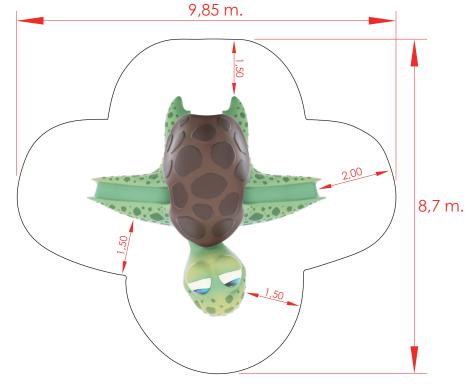

Safety area: 53,88 m²

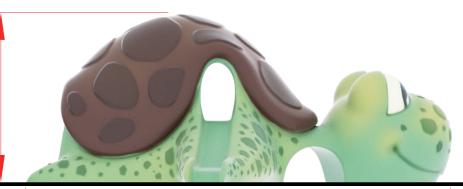

6,2 m.

5,7 m.

Anchoring details



The Turtle (age 3-12 years) Ref. KZM4000



Installation:

Anchored to the concrete floor with expansion or chimical bolts all around the perimeter using the base tab. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

Maintenance:

Check: all fixing points, screws and bolts must be periodically checked and tightened again if necessary. The checking date must be annotated in order to establish a control.

Inspections:

- -Routine inspection: A visual and functional inspection must be carried out every 3 months in order to check the module has suffered no mishandles or vandalisms.
- -Yearly inspection: A full inspection of the whole installation has to be done to verify it keeps all security norm standards and has suffered no alterations.











The company reserves the right to perform any modification or change in their products.

