




Climbing Wall - The Cone (age 3-6 years)



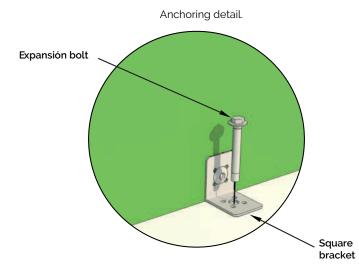

Installation.

Anchored to the floor with expansion bolts. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

Maintenance.

-Check: All fixing points. Screws and bolts must be periodically checked, then tightened and adjusted if necessary. The checking date must be annotated in order to establish a control.

Inspections.

3 Rubber.

5 Foundation.

4 Foundation's upper layer.

-Routine Inspection: A visual and functional inspection must be carried out every 3 months in order to check that the module has suffered no harm due to vandalish or mishandling.

-Yearly Inspection: A full inspection of the entire installation must be done to check that it keeps all norm standards and has suffered no alterations.







C/ Foia. 13 P.I. Alquería de Moret 46210 Picanya (Valencia)



+34 963 313 677




kiwi@kiwipw.com



www.kiwipw.com

The company reserves the right to perform any modification or change in their products.

Dimensions for the concrete slab. (m.)



Anchoring detail 80 mm. \triangle 1 Cone. \triangle 2 Square bracket.