




Swing

Ref. KP4016

Last check 07/03/2016

Pag. 1/2

EN-1176-1:2009

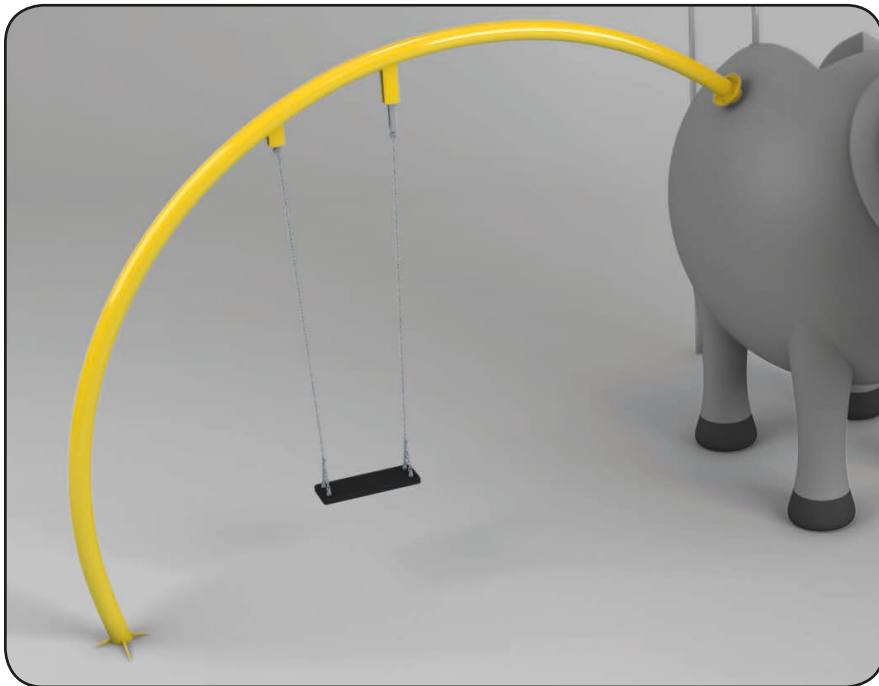

Installation example

ACCESSORIES



Swing

Ref. KP4016

Last check 07/03/2016

Pag. 2/2

EN-1176-1:2009



Technical information.

Structure: Manufactured in Ø90 mm. curved tubular steel. Welded to anchor plate.

Finishes: Baked paint in various colors.

Swing: Injected rubber seat with aluminum reinforcement and galvanized steel chains.

Installation: Fixed to the anchoring plate on the playground with 6 bolts.

Technical data.

Assembly: 2 pers.

Weight: 175 Kg.

Total height: 2,54 m.

Free fall height: 1,35 m.

Dimensions: 3,15 x Ø0,09 m.

For further information.

Contact us.

KIWI PLAYGROUNDS & WOODS.

C/ Foia, 13 P.I. Alqueria de Moret


46210 Picanya (Valencia)

Tel. +34 963 313 677

E-mail: kiwi@kiwipw.com

Web: www.kiwipw.com

The company reserves its right to apply any modifications or changes to their products.

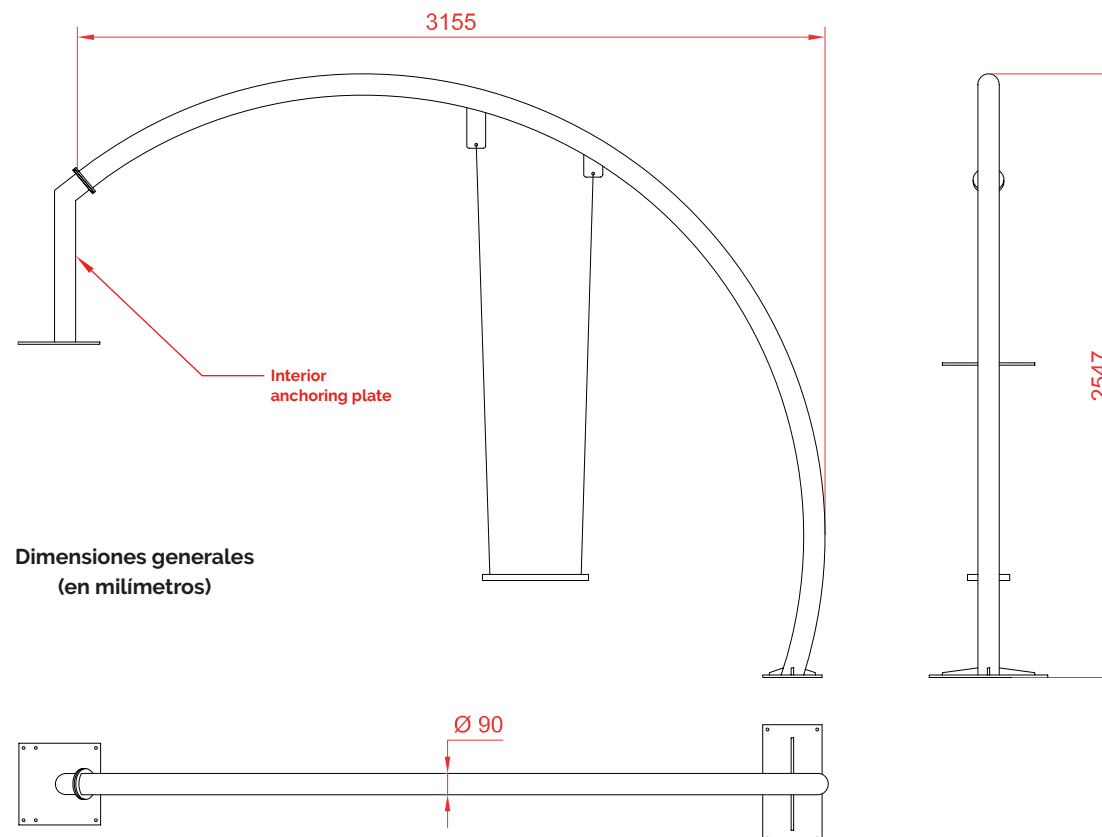

Installation.

- Anchoring to the floor with 4 expansion bolts. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

Maintenance.

- Check: All fixing points, screws and bolts must be periodically checked and they will be tightened and adjusted again if necessary. The checking date must be annotated in order to establish a control.

Inspections.

- Routine Inspection: A visual and functional inspection must be carried out every 3 months in order to check that the module has not suffered any harm due to vandalism or mishandling.

- Yearly Inspection: A full inspection of the installation as a whole must be done in order to check that it keeps all norm standards and that it has not suffered any alterations.

ACCESSORIES