


SPRINCS SPRINCS

Last check oct. 2019



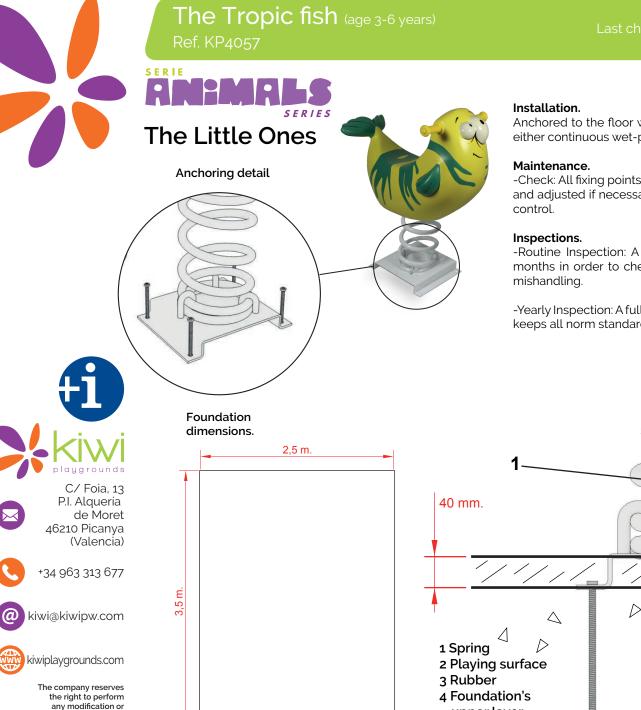

change in their products.

Anchored to the floor with expansion bolts. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

-Check: All fixing points. Screws and bolts must be periodically checked, then tightened and adjusted if necessary. The checking date must be annotated in order to establish a control.

-Routine Inspection: A visual and functional inspection must be carried out every 3 months in order to check that the module has suffered no harm due to vandalish or mishandling.

-Yearly Inspection: A full inspection of the entire installation must be done to check that it keeps all norm standards and has suffered no alterations.

2

 \triangleright

 \bigtriangleup

 \bigtriangleup

 \triangleright

[

Spring Anchoring detail.

 \bigtriangleup

1

 \triangleright

upper layer

5 Foundation

