

SPRINGS

 The Seal (age 3-6 years)
 Last check oct. 201

 Ref. KP4059
 SER IE

 SER IE
 SER IE

 Anchoring detail
 Installation.

 Anchoring detail
 Check: All fixing points. Screws and

Anchored to the floor with expansion bolts. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

-Check: All fixing points. Screws and bolts must be periodically checked, then tightened and adjusted if necessary. The checking date must be annotated in order to establish a control.


Inspections.

-Routine Inspection: A visual and functional inspection must be carried out every 3 months in order to check that the module has suffered no harm due to vandalish or mishandling.

-Yearly Inspection: A full inspection of the entire installation must be done to check that it keeps all norm standards and has suffered no alterations.

S S

PRIN

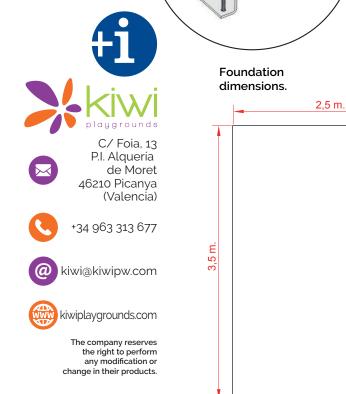

2 40 mm. \triangleright \bigtriangleup \bigtriangleup \triangleright \bigtriangleup \triangleright 1 Spring 2 Playing surface 3 Rubber 1 \triangleright 4 Foundation's upper layer \bigtriangleup \triangleright [**5** Foundation

Spring Anchoring detail.