







Example combination



Bull (age 6-12 years)

Ref. KP4010

### Technical information.

Animal: Build in poliester painted by mass, with gel-coat of predominant color and anti-graffiti treatment.

**Structure**: Internal build in galvanized steel pipe. Surface: Walk zone finished in hight resistance EPDM.

Anchoring: Galvanized steel for mounting on concrete foundation.

#### Technical data.

Assembly: 2 pers. 2 hours.

Weight: 300 Kg. Total hight: 2,4 m.

Free fall height: 1,50 m.

Safety area: 33,46 m<sup>2</sup>. (example) Biggest piece dimension: 3 m. Spare pieces availability: 3 years.

#### For further information.

Contact us.


KIWI PLAYGROUNDS & WOODS.

C/ Foia, 13 P.I. Alqueria de Moret 46210 Picanya (Valencia) Tel. +34 963 313 677

E-mail: kiwi@kiwipw.com


Web: www.kiwipw.com

The company reserves its right to apply any modifications or changes to their products.

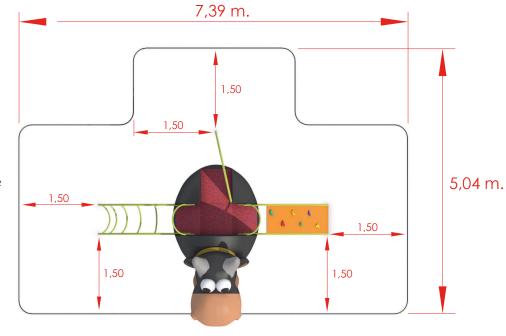

Safety area 33,46 m<sup>2</sup> (with example elements)

## General dimensions (in millimeters)

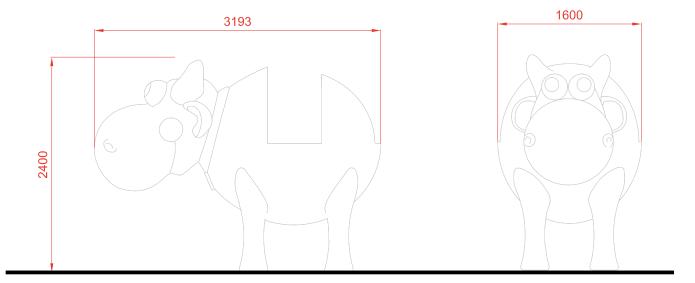







#### Installation.

Anchored to the floor with expansion bolts. Elements like the slide must be anchored with threaded rod and epoxi. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.


#### Maintenance.

-Check: All fixing points, screws and bolts must be periodically checked and they will be tightened and adjusted again if necessary. The checking date must be annotated in order to establish a control.


#### Inspections.

- -Routine Inspection: A visual and functional inspection must be carried out every 3 months in order to check that the module has not suffered any harm due to vandalism or mishandling.
- -Yearly Inspection: A full inspection of the installation as a whole must be done in order to check that it keeps all norm standards and that it has not suffered any alterations.

# Anchoring detail

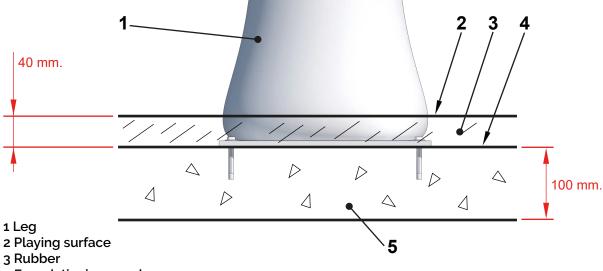

Anchoring detail





- 4 Foundation's upper layer
- 5 Foundation